

MDH

DIFFERENTIAL HIGH PRESSURE INDICATOR


operating pressure	50 bar
operating temp. range	1,5 to 65 °C

APPLICATIONS

- general industrial applications
- automotive
- electronics
- food and beverage
- chemical
- petrochemical
- plastics
- paint

DESCRIPTION

Differential pressure drop indicator MDH has been developed for accurate indication of pressure drop across the filter element in compressed air system. MDH is optimised for installation on the head of the filter housing.

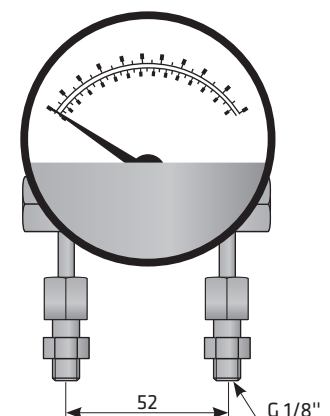

TECHNICAL DATA

Ambient temperature range	1,5 - 60 °C	35 - 140°F
Measuring range	0 - 1 bar	0 - 14,5 psi
Static pressure	50 bar	725 psi
Protection class	IP 54	
Accuracy	±3% of ful scale	
Connection	2 x G 1/8" male	