



# MSS

## MOBILE STEAM STERILIZER

**1 to 3,6 bar**

steam pressure

**100 °C to 135 °C**

steam operating temperature

**up to 90 min**

sterilisation time

**up to 90 min**

drying time

### DESCRIPTION

Compressed air piping with high temperature and humidity is a suitable environment for microbial growth. In order to stop microbial activity, filters have to be sterilized. Sterilization can be done in place or in the autoclave. To perform autoclave, sterilization filters need to be removed from the system and due to septic conditions in the atmosphere it is difficult to prevent contamination during re-assembly of the installation.

Sterilization in place (SIP) ensures much better results and is more common in the process industry. Steam sterilization is an effective method to stop microbial activity. "Mobile Steam Sterilizer" is designed for easier, cheaper and faster SIP. MSS can be easily connected to any part of installation where sterilization is required. After filter sterilization is completed MSS can simply be disconnected and transported to another location.




### APPLICATIONS

- Food industry
- Wine production
- Dairies
- Small breweries


### INSTALLATION OF CONVENTIONAL STERILIZATION

Scheme of a conventional sterilization in place system. All the equipment surrounded by red line is required to perform sterilization of the filter housing in the upper right corner. Such a fixed steam distribution line connects steam generator to every filter.

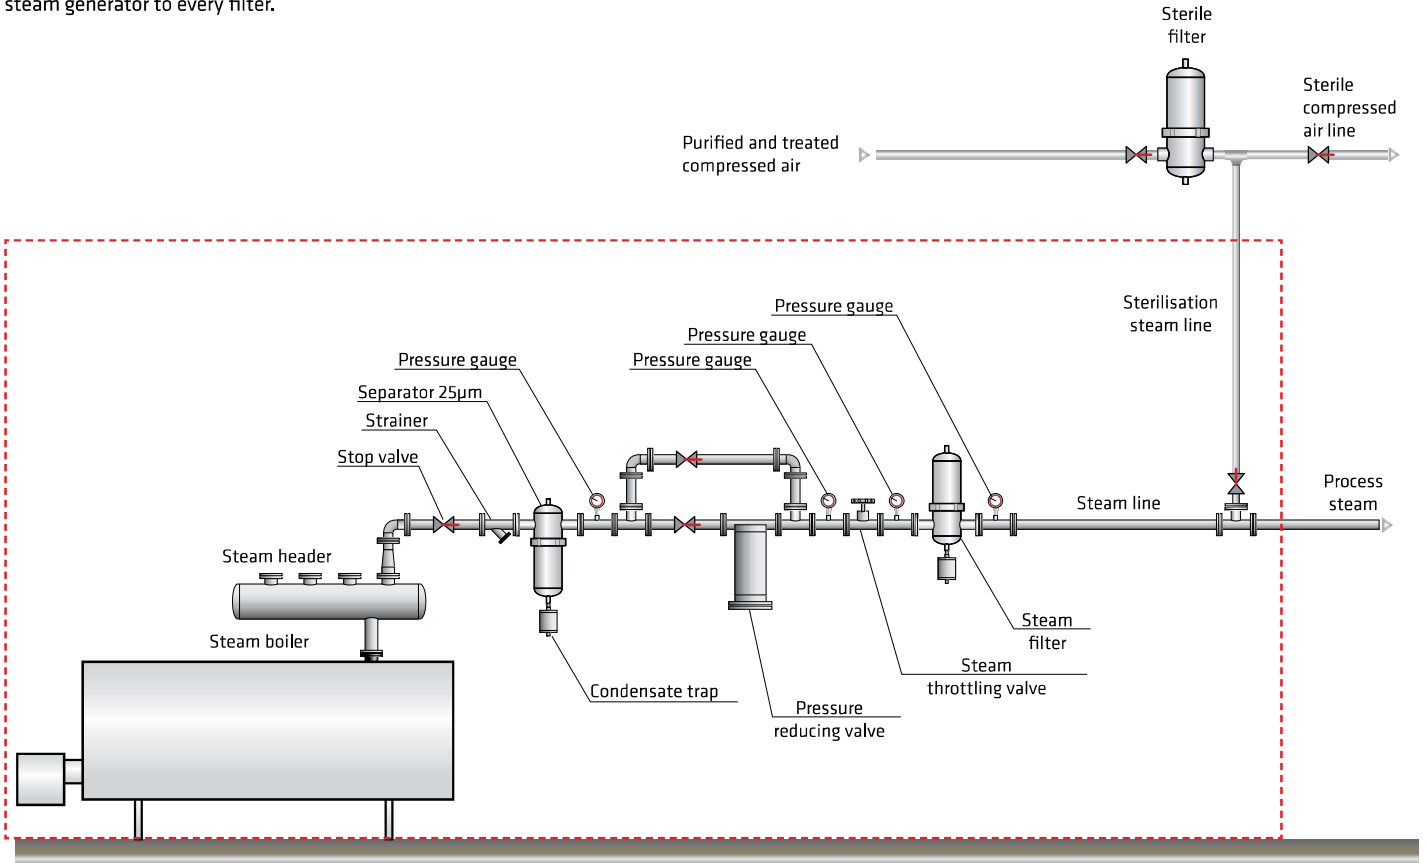

### INSTALLATION OF MSS ON STERILE FILTER

Scheme of a new Mobile Steam Sterilizer connected to a filter. After sterilization cycle is completed flexible hose for steam distribution is disconnected from the filter and complete sterilizer (equipment outlined by a red frame) can be moved to another location.

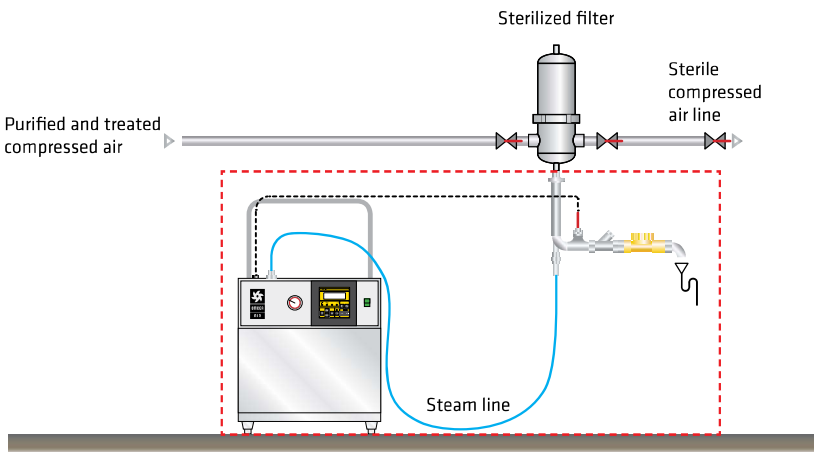

TECHNICAL DATA	MSS
Power supply	110-230V / 50/60 Hz
Power consumption	1,7 kW
Sterilization temperature	Adjustable from 100 - 135 °C
Sterilization time	Adjustable up to 90 min
Material drying time	Adjustable up to 90 min
Sound level	60 dB(A)
Dimensions W x H x -L	450 x 855 x 445 mm