



100, 250, 420 bar
operating pressure

40 to 715 Nm³/h
volume flow rate

1/4" to 2"
connections

1,5 to 65 °C
operating temperature range

stainless steel **1.4301**-standard
stainless steel **1.4404**-option
material

DESCRIPTION

CKL-IHP condensate separators are designed for high efficient removal of bulk liquids from high pressure compressed air systems.

Condensate separator element inside the housing separates already liquefied water from mainstream and prevents the liquids and large particles from being airborne again.

To discharge condensate from the CKL-IHP condensate separator it is essential to install condensate drain. Please take appropriate pressure level into account.

APPLICATIONS

- General industrial applications
- Automotive
- Electronics
- Food and beverage
- Chemical
- Petrochemical
- Plastics
- Paint

CKL-IHP SERIES


STAINLESS STEEL HIGH PRESSURE CONDENSATE SEPARATORS





TECHNICAL DATA

Filter housing size	Pipe size		Max. oper. pressure		Flow rate at 7 bar(g), 20 °C		Temperature oper. range		Dimensions [mm]			Mass
	inch	bar	psi	Nm ³ /h	scfm	°C	°F	A	B	C	kg	
CKL-IHP 003	1/4"	100/250/420	1450/3626/6091	40	23,5	1,5 - 65	35 - 149	182	98	104	7,9	
CKL-IHP 005	3/8"	100/250/420	1450/3626/6091	70	41,2	1,5 - 65	35 - 149	182	98	104	7,9	
CKL-IHP 007	1/2"	100/250/420	1450/3626/6091	130	76,5	1,5 - 65	35 - 149	230	118	129	15,7	
CKL-IHP 010	3/4"	100/250/420	1450/3626/6091	195	115	1,5 - 65	35 - 149	254	118	129	16,6	
CKL-IHP 018	1"	100/250/420	1450/3626/6091	275	162	1,5 - 65	35 - 149	276	145	158	27,3	
CKL-IHP 030	1 1/4"	100/250/420	1450/3626/6091	380	223	1,5 - 65	35 - 149	328	145	158	29,6	
CKL-IHP 047	1 1/2"	100/250/420	1450/3626/6091	495	291	1,5 - 65	35 - 149	385	195	216	67,8	
CKL-IHP 094	2"	100/250/420	1450/3626/6091	715	421	1,5 - 65	35 - 149	460	195	216	73,5	

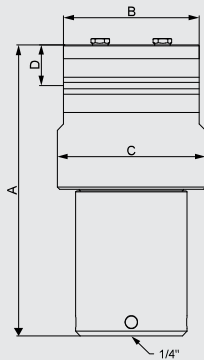

quality class - solids (ISO 8573-1)	-
quality class - water (ISO 8573-1)	8
quality class - oils (ISO 8573-1)	-
efficiency	>98%

CORRECTION FACTORS

Operating pressure [bar]	7	25	40	64	100	250	420
Operating pressure [psi]	100	362	580	928	1450	3625	6091
Correction factor	1	3	5	8	12	12	12