



14 bar
operating pressure

75 to 3600 Nm³/h
volume flow rate

1/4" to 3"
connections

up to +150 °C
operating temperature range

stainless steel 1.4404-standard
stainless steel 1.4301-option
material

DESCRIPTION

WFIT welded stainless steel filter housings with threaded connections have been developed for filtration of compressed air as well as many other gasses where the risk for corrosion is very high or where stainless steel housing is required. To meet the required gas quality appropriate filter element must be installed into filter housing.

For list of suitable gasses please contact us or your local dealer.

WFIT process filter housing can be used in variety of applications. For applications not listed please contact us or your local dealer.


Fluid group 1 on request.

APPLICATIONS

- General industrial applications
- Biotechnology
- Breweries
- Chemical industry
- Petrochemical industry
- Dairies
- Fermentation processes
- Pharmaceutical industry
- Hospitals

WFIT SERIES

WELDED STAINLESS STEEL COMPRESSED AIR FILTERS - THREADED CONNECT.

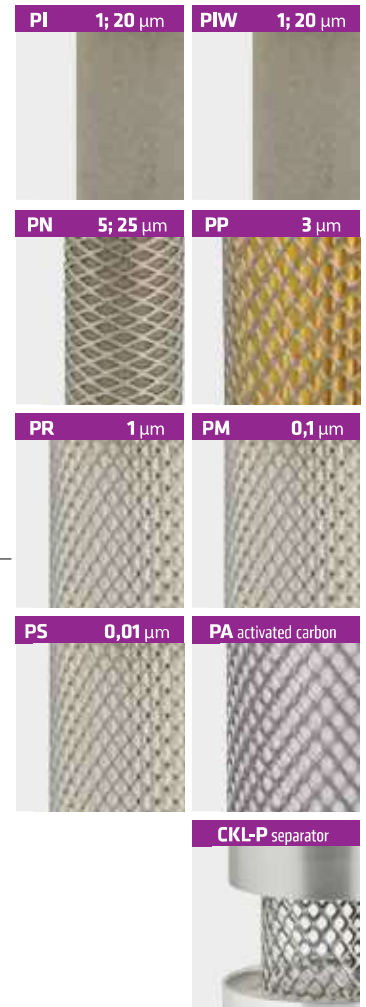



TECHNICAL DATA									FILTER ELEMENTS									
Filter housing size	Pipe size D	Operat. press.	Flow rate at 7 bar(g), 20°C		Dimensions [mm]			Mass kg	PI prefilter	PIW prefilter	PN prefilter	PP prefilter	PR prefilter	PM microfilter	PS microfilter	PA activated carbon	CKL-P	
	inch		bar/psi	Nm³/h	scfm	A	B		C	1; 20 µm	1; 20 µm	5; 25 µm	3 µm	1 µm	0.1 µm	0.01 µm		
WFIT 005	1/4"	14/203	75	44	204	120	76,1	1,9	0310 PI	0310 PIW	0310 PN	0310 PP	0310 PR	0310 PM	0310 PS	0310 PA	0310 CKL-P	
WFIT 007	3/8"	14/203	105	62	235	120	76,1	2,1	0410 PI	0410 PIW	0410 PN	0410 PP	0410 PR	0410 PM	0410 PS	0410 PA	0410 CKL-P	
WFIT 010	1/2"	14/203	150	88	239	121	76,1	2,2	0420 PI	0420 PIW	0420 PN	0420 PP	0420 PR	0420 PM	0420 PS	0420 PA	0420 CKL-P	
WFIT 018	3/4"	14/203	225	132	263	121	76,1	2,3	0520 PI	0520 PIW	0520 PN	0520 PP	0520 PR	0520 PM	0520 PS	0520 PA	0520 CKL-P	
WFIT 030	1"	14/203	315	185	278	136	88,9	3,1	0525 PI	0525 PIW	0525 PN	0525 PP	0525 PR	0525 PM	0525 PS	0525 PA	0525 CKL-P	
WFIT 047	1 1/4"	14/203	420	247	343	155	88,9	3,4	0725 PI	0725 PIW	0725 PN	0725 PP	0725 PR	0725 PM	0725 PS	0725 PA	0725 CKL-P	
WFIT 070	1 1/2"	14/203	600	353	376	180	114,3	4,6	0730 PI	0730 PIW	0730 PN	0730 PP	0730 PR	0730 PM	0730 PS	0730 PA	0730 CKL-P	
WFIT 094	2"	14/203	900	530	458	180	114,3	5,4	1030 PI	1030 PIW	1030 PN	1030 PP	1030 PR	1030 PM	1030 PS	1030 PA	1030 CKL-P	
WFIT 150	2"	14/203	1.260	742	571	180	114,3	6,1	1530 PI	1530 PIW	1530 PN	1530 PP	1530 PR	1530 PM	1530 PS	1530 PA	1530 CKL-P	
WFIT 175	2 1/2"	14/203	1.680	989	722	226	139,7	11,4	2030 PI	2030 PIW	2030 PN	2030 PP	2030 PR	2030 PM	2030 PS	2030 PA	2030 CKL-P	
WFIT 200	3"	14/203	2.400	1.413	1004	224	139,7	12	3030 PI	3030 PIW	3030 PN	3030 PP	3030 PR	3030 PM	3030 PS	3030 PA	3030 CKL-P	
WFIT 240	3"	14/203	3.600	2.119	1029	252	168,3	16	3050 PI	3050 PIW	3050 PN	3050 PP	3050 PR	3050 PM	3050 PS	3050 PA	3050 CKL-P	
									quality class - solids (ISO 8573-1)	-	-	-	6	3	2	1	1 ⁰	-
									quality class - oils (ISO 8573-1)	-	-	-	-	-	2	1	1	-
									pressure drop - new element-dry [mbar]	≤2600; ≤60	≤2600; ≤60	10	10	20	50	80	60	-
									filter media	sintered INOX 1,4404	sintered INOX 1,4404	stainless steel mesh 1,4301	acrylic fibres, cellulose	borosilicate micro fibres		borosilicate micro fibres, activ. carbon		-
									pleated version	-	-	-	✓	✓	✓	✓	-	-
									wrapped version	-	-	✓	-	-	-	-	✓	-
									sintered version	✓	✓	-	-	-	-	-	-	-
									min. operating temperature (°C / °F)	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35	1,5 / 35
									max. operating temperature (°C / °F)	150 / 302	150 / 302	150 / 302	65 / 149	120 / 248	120 / 248	120 / 248	45 / 113	120 / 248

CORRECTION FACTORS														
Operating pressure [bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	
Operating pressure [psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	
Correction factor	0,38	0,50	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	